

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/073791 A1

(51) International Patent Classification⁷: **G02F 1/1345**

Noriyoshi [JP/JP]; c/o Philips Japan, Ltd., Philips Bldg.,
2-13-37, Kohnan, Minato-ku, Tokyo 108-8507 (JP).

(21) International Application Number:
PCT/IB2004/052839

(74) Agents: **TSUGARU, Susumu** et al.; c/o Philips Japan,
Ltd., Philips Bldg., 2-13-37, Kohnan, Minato-ku, Tokyo
108-8507 (JP).

(22) International Filing Date:
17 December 2004 (17.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/IB2004/000066
5 January 2004 (05.01.2004) IB

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(71) Applicant (*for all designated States except US*): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **MATSUURA,**

[Continued on next page]

(54) Title: ELECTRONIC DEVICE WITH BENDING WIRING PATTERN

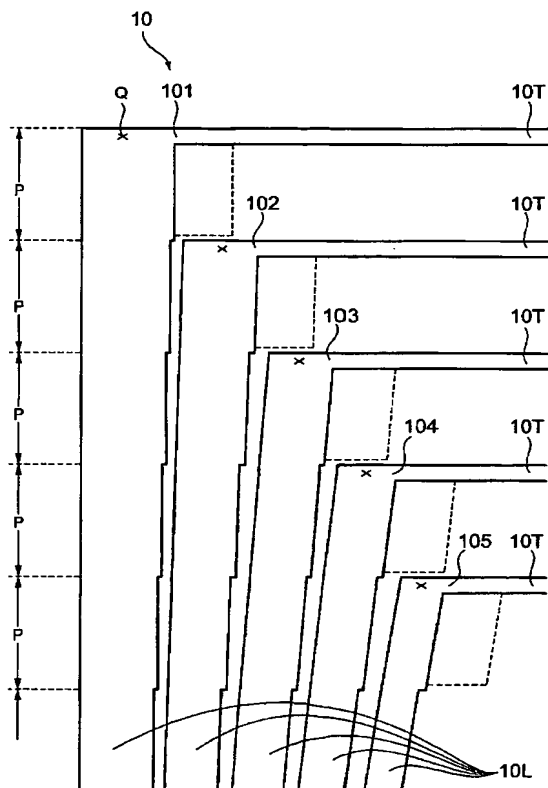

(57) Abstract: An object of the invention is to provide a form of bending wiring patterns whose wiring resistances can be as equal as possible based on a simple structure and to provide an electronic device based on the form. An electronic device having a substrate (100) on which a plurality of conductive lines (10) are formed, the conductive lines (10) having such patterns that the lines are straightly extended from their predetermined front ends 1s and thereafter bend by turns in substantially the same direction for each predetermined interval P to further extend to the respective predetermined connection targets (30). The conductive lines (10) have their straightly-extending portions (10L) of varied line widths and a line width at a nearer position to a bending point (Q) of the line is larger than a line width at a farther position from the bending point (Q), so as to equalize at least resistance values of the straightly-extending portions (10L) of the conductive lines (10).



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*